


测试:

1. 100%实机检验测试.
2. 待显示后, 续放5S以上.
3. 测试过程中需用手揉捏线材, 无闪屏, 雪花, 拖影, 重影, 缺色等显示异常.
4. 摇摆测试, 上下左右45度角摇摆.

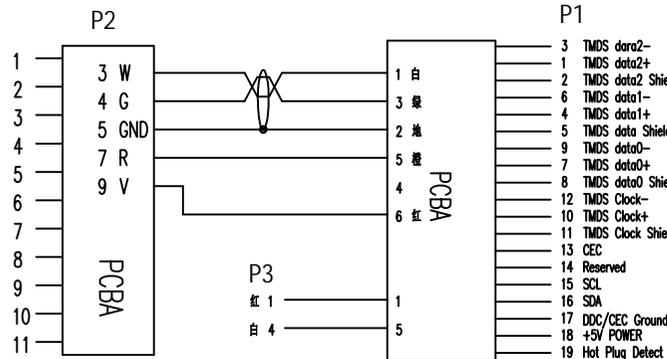

| NO. | PART NAME | PART NO | SPEC DESCRIPTION | QTY | UNIT | P/N: | CUSTOMER. P/N: | | | | | | | | | | | | | | | | | | | | |
|--|----------------|----------|--|------|------|------|--|-----|-----------|----------------|--|----------|------|------|-----|----|--------|-----|----|------|-----|-----|------|-----|------|------|-----|
| 7 | 胶料 | | 黑色45P PVC外模料 | 12 | g | A0 | INITIAL RELEASE | | | | | | | | | | | | | | | | | | | | |
| 6 | 胶料 | | 本色PE内模料. | 6 | g | REV | DESCRIPTION OF CHANGE | | | | | | | | | | | | | | | | | | | | |
| 5 | 半成品 | | MHL PCB,HDMI AM,L21.0*W15.9*T1.5mm EP94M1L,黑色插头,铁壳镀镍,带IC,带电子元件 | 1 | PC | | 14/12/25 | | | | | | | | | | | | | | | | | | | | |
| 4 | 插头 | | USB2.0 A TYPE 4P M,PIN:G/F,铁壳镀镍.黑色绝缘 | 1 | PC | | DATE | | | | | | | | | | | | | | | | | | | | |
| 3 | 插头 | | MICRO USB 11P M,端子镀金:G/F,铁壳镀镍.黑色绝缘,带PCB板(奇辉) | 1 | PC | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 线材 | | 26AWGx2C,黑色PVC外被,OD:2.5mm | 770 | mm | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 线材 | | [30AWGx1P+D(7/0.12)+AL]+30AWGx1C+28AWGx1C+AL黑色PVC,OD:3.5mm | 1770 | mm | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | <table border="1"> <thead> <tr> <th colspan="2">TOLERANCE</th> <th rowspan="3">BossConn</th> <th rowspan="3">SCALE</th> <th rowspan="3">UNIT</th> <th rowspan="3">NONE</th> <th rowspan="3">REV</th> <th rowspan="3">A0</th> </tr> <tr> <th>INCHES</th> <th>M/M</th> </tr> </thead> <tbody> <tr> <td>.X</td> <td>.015</td> <td>.30</td> </tr> <tr> <td>.XX</td> <td>.010</td> <td>.10</td> </tr> <tr> <td>.XXX</td> <td>.005</td> <td>.05</td> </tr> </tbody> </table> | | TOLERANCE | | BossConn | SCALE | UNIT | NONE | REV | A0 | INCHES | M/M | .X | .015 | .30 | .XX | .010 | .10 | .XXX | .005 | .05 |
| TOLERANCE | | BossConn | SCALE | UNIT | NONE | REV | A0 | | | | | | | | | | | | | | | | | | | | |
| INCHES | M/M | | | | | | | | | | | | | | | | | | | | | | | | | | |
| .X | .015 | | | | | | | .30 | | | | | | | | | | | | | | | | | | | |
| .XX | .010 | .10 | | | | | | | | | | | | | | | | | | | | | | | | | |
| .XXX | .005 | .05 | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | <table border="1"> <thead> <tr> <th>DATE</th> <th>DWG NO.:</th> </tr> </thead> <tbody> <tr> <td>14/12/25</td> <td></td> </tr> </tbody> </table> | | DATE | DWG NO.: | 14/12/25 | | | | | | | | | | | | | | | | |
| DATE | DWG NO.: | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 14/12/25 | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | <table border="1"> <thead> <tr> <th>TITLE:</th> <th>CUSTOMER. P/N:</th> </tr> </thead> <tbody> <tr> <td>MHL CABLE,HDMI A/M TO MICRO USB 11P+USB2.0 A/M L=1.8+0.8M 黑色</td> <td>MHL-CA08</td> </tr> </tbody> </table> | | TITLE: | CUSTOMER. P/N: | MHL CABLE,HDMI A/M TO MICRO USB 11P+USB2.0 A/M L=1.8+0.8M 黑色 | MHL-CA08 | | | | | | | | | | | | | | | |
| TITLE: | CUSTOMER. P/N: | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHL CABLE,HDMI A/M TO MICRO USB 11P+USB2.0 A/M L=1.8+0.8M 黑色 | MHL-CA08 | | | | | | | | | | | | | | | | | | | | | | | | | | |