


ZONE	SYMBOL	REVISION	APPROVAL	DATE

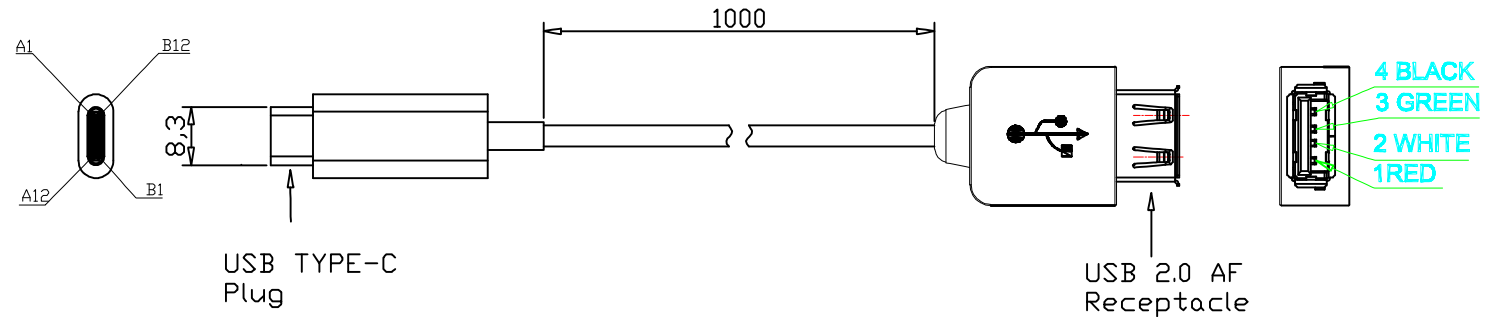

USB TYPE-C Plug		Wire		USB 2.0 AF Receptacle	
PIN	Signal Name	Wire Number	Signal Name	PIN	Signal Name
A1,A12,B1,B12	GND	1	GN_Pwr-t1	4	GND
A4,B4,A9,B9	VBUS	2	Pwr_Vbus	1	VBUS
A5	CC				
B5	Vconn				
A6	Dp1	3	UTP_Dp	3	D+
A7	Dn1	4	UTP_Dn	2	D-
Shell	Shield	Braid	Shield	Shell	Shield

NOTE

- 1.100% OPEN/SHORT TEST.
- 2.CONDUCT RESISTANCE,2.0Ω(MAX).
- 3.INSULATION RESISTANCE,10MΩ(MIN).
- 4.THE MARKING ON THIS PRODUCT DOESN'T CONTAIN ENVIRONMENTAL HAZARDOUS MATERIALS PER 2002/95/EC FOR ROHS COMPLIANT

No.	DESCRIPTION	Q'TY	UNIT
3	USB 2.0 AF Receptacle	1	Pcs
2	USB C-TYPE PLUG	1	Pcs
1	CABLE	1	M

UNLESS OTHERWISE SPECIFIED
DIMENSION ARE IN CENTIMETER
TOLERANCE ARE :
FRACTION DECIMALS ANGLE

X ± 3 X' ± 5'
XX ± 5 X' ± 3'
XXX ± 10

BossConn

APPROVALS	DATE	TITLE
DRAWN WANGWEI	2012/10/10	USB C-TYPE TO USB 2.0 AF Receptacle
CHECKED JACK	2012/10/10	PART NO.
APPROVED TIRE	2012/10/10	USB3.1-MF-CA02

SCALE 1:1 UNIT mm SIZE A4